

Cementex

The Safety Tool Specialists

**Sticks, Hooks, Grounding,
Meters & Detectors**

Fiberglass Pole Ratings:

100% of the fiberglass poles provided by Cementex are tested to meet the 100kV per foot testing standard (ASTM F711). This allows completed tools made from this fiberglass to be used at the minimum clear insulation distances specified by OSHA. The quality of products combined with industry standards for minimum clear insulation distances give the users an additional safety factor.

Clampsticks



"AKA" Shotgun Sticks feature a high-quality foam-filled fiberglass reinforced plastic tube providing maximum insulation and mechanical strength. They are lightweight and easy-to-handle.

Feature a fixed length shotgun with external operating rod.

Tested per ASTM F711.



CPCS-8106

PN	DESC
CPCS-8104.....	4'6"
CPCS-8106.....	6'6"
CPCS-8108.....	8'6"
CPCS-8108U....	8'6" with Universal Adapter
CPCS-8110.....	10'6"
CPCS-8112.....	12'6"
CPCS-A10019...	Clampstick Adapter
CPCS-13413.....	Folding Shotgun Stick

Sticks and Hooks

Telescoping Hot Sticks



Telescoping Hot Sticks offer long-reach, speed, convenience and safety.

Fabricated of reinforced high density electrical grade fiberglass laminate for greater strength and dielectric properties.

Fluorescent tip section is highly visible and has a foam core. All tip sections are 1.15" diameter. Cushioned cap protects base end.

Triangle shape eliminates "twisting and turning" and enables each section to "lock in automatically"; providing an ergonomic design for better control.

Larger shape lock buttons provide easy operation.

Add or remove sections without the use of tools. Sections have a smooth, glossy surface and only one size lock button and spring for replacement.

Universal head made of strong aluminum alloy incorporates corona discharge design and holds universal attachments securely.

Tested per ASTM F711.

PN	Extended	Retracted
CPTS-208.....	8'	26"
CPTS-212.....	12'	44"
CPTS-216.....	16'	56"
CPTS-220.....	20'	58"
CPTS-225.....	25'6"	60"
CPTS-225HSB... 25'6" w/ Bag		60"
CPTS-230.....	30'	61-5/8"
CPTS-235.....	35'	63-3/8"
CPTS-240.....	40'	65-3/8"

PN _____ 1.25" Diameter _____
 CPHS-5674..... 4'
 CPHS-5676..... 6'
 CPHS-5678..... 8'
 CPHS-56710..... 10'
 CPHS-56712..... 12'
 CPHS-5464..... 4' Extension
 CPHS-8392..... 56" Extension
 CPDH-10431..... Universal Disconnect Hook



CPDEHS-4618U.... Double End with Hook

PN _____ 1.5" Diameter _____
 CPHS-9957..... 10' Heavy Duty
 CPHS9957K..... 10' Heavy Duty with Bag
 CPHS-4220..... 10'
 CPHS-4225..... 20'

Universal Hot Sticks

Tested to meet the 100kV per foot testing standard (ASTM F711). Universal sticks feature a high-quality foam filled fiberglass reinforced plastic core providing maximum insulation and mechanical strength. They are light-weight and easy-to-handle with a hard-gloss, porosity-free bright safety yellow finish which is easy to clean and won't chip or peel.

Permanently mounted fiberglass prongs adapt to all Universal adapter tools. Universal Hotsticks include disconnect hook.

*optional tools and accessories available upon request

Universal Head with Disconnect Stick Adapter



PN _____ DESC _____
 CPSS-4604..... 1.25" X 4'
 CPSS-4606..... 1.25" X 6'
 CPSS-4608..... 1.25" X 8'
 CPSS-4610..... 1.25" X 10'
 CPSS-4612..... 1.25" X 12'



Switch Sticks

- Switch heads are made of bronze
- Designed to NEMA standards

Sticks and Hooks

PN _____ DESC _____
 ST-HSB-4..... 4'8"
 ST-HSB-6..... 6'8"
 ST-HSB-8..... 8'8"
 ST-HSB-10..... 10'8"
 ST-HSB-12..... 12'8"
 ST-HSB-13..... 13'
 ST-HSB-14..... 14'8"



Hot Stick Storage Bags

High visibility bag with dual snaps (Orange) protect your investment and expand the life of your hot stick tools.

Capacitor Discharge Tool



Safely drain the capacitive charge after the circuit is deenergized.
Optional resistor available to limit discharge current.

Includes:

- 24" X 1-1/4" O.D. electrically tested (ASTM F711) fiberglass pole with hand guard
- 1/4" stainless steel hook with 1-3/8" opening
- Grounding Lead - extra flexible No. 2 stranded copper grounding cable with safety yellow neoprene jacket with two hole, tin-plated copper lug terminated on one end in a heat-shrink sleeve
- Rubber tool holder for storage

CPCD-1006

***Comes with Lead and hook,
grounding clamp sold separately***



CPCD-6753

PN _____ DESC _____

CPCD-1004..... Tool with 6' Lead

CPCD-1005..... Tool with 8' Lead

CPCD-1006..... Tool with 10' Lead

CPCD-1007..... Tool with 15' Lead


CPCD-1008..... Tool with 20' Lead

CPCD-6753..... Add on Resistor Stick

Sticks and Hooks

Rescue Hooks

- Constructed of high-strength vinyl-dipped steel
- 18" Opening mounted on 1.25" O.D. Fiberglass Pole
- 100% Electrically proof tested (ASTM F711)

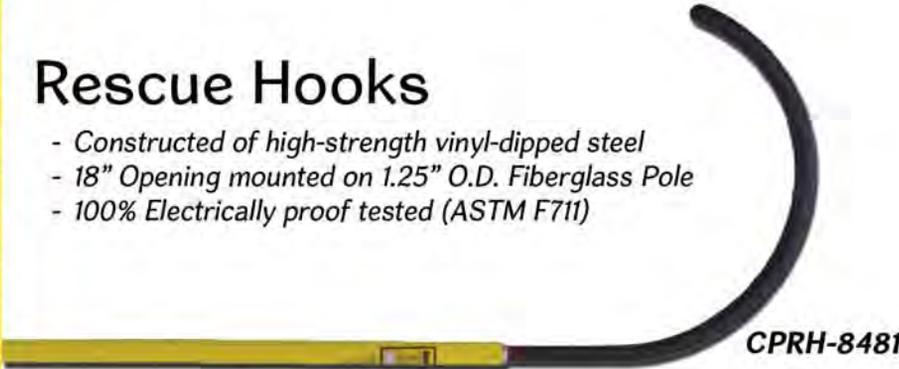

CPRH-8481

PN _____ DESC _____

CPRH-8481..... 6'

CPRH-8482..... 8'



Electro Static Precipitator

Designed to safely remove the static charge after de-energizing for service work

Includes:

- Brass alloy U-shaped hook to engage precipitator plates
- 4' X 1-1/4" fiberglass installation pole
- 6' of No. 2 stranded extra-flexible copper grounding cable with durable bright yellow neoprene jacket
- Aluminum alloy T-Handle flat face ground clamp can be attached to flat, round, and square hardware. Serrated jaws 1-1/2" max. capacity



PN _____ DESC _____

CPDS-6768..... Tool with 6' Lead

CPDS-CT02447... Tool with 12' Lead



CPDS-6768

Grounding Sets

Four way connector grounding sets provide an excellent system for grounding of 3 phase systems
25kA 15 Cycles

- Four Way Connector with Sleeves (1)
- 1.5" Serrated Jaw Clamps with Sleeves 21575(4)
- Double Hanger Stud
- Contact Stud
- 3 leads of 1/0 Yellow Cable (10ft each)
- 1 lead of 1/0 Yellow Cable (8ft)
- Ferrules (4 pair)
- 26 lbs.



CPGS4W

PN _____ DESC _____
CPGS4W..... 4 Way Grounding Set

CPGSB-4007..... Grounding System Carry Bag

CUSTOM GROUNDING SETS ARE AVAILABLE

Grounding and Guards

Pole Guards

- Designed for easy installation and removal
- Guards are tested at 35kV
- Corrugated design allows unit to be easily opened for installing. Supplied with rubber straps to secure the guard to the pole. Strap can be removed with hot stick.
- Fits poles between 6"- 12" diameter
- Brush contact only



CCPPG-11927

PN _____ DESC _____
CPPG-11925..... 3' length
CPPG-11927..... 6' length

Digital High/Low Voltage Phasing Meter

PN _____ DESC _____

CPPM-6702..... 0-40kV Digital Volt Meter with Conductor Hooks
Includes Carrying Case, Battery, and instructions
CPPM-6703..... Pair of Extension Resistors--Increase Operating Range
CPDPK-6711.... Digital Phasing Kit includes CPPM-6702 along with
additional Carrying Case and two 6' poles



- 3 Digit kV Digital Display with 1/2" tall digits
- Solid State Backlit Display
- 10' coiled cable (retracts to 16")
- Rugged plastic case accomodates CPPM-6703 and more
- Attached to two 1-1/4" x 12" Long Fiberglass Sticks. Female universal splines allow attachment to Universal Hot Sticks
- One Conductor hook (2" Diameter) and one 2-1/2" Straight Probe are provided

Meters and Detectors

Voltage Detector

- Non-contact high voltage detector
- Wide ranges of detection--80V to 275kV
- Eight switch-selectable voltage sensitivity ranges
- Lightweight--minimizes sway at the end of long hot sticks
- Audible and visual indication of live voltage
- Self-test ensures that all system functions and indications are working properly by energizing the complete system
- Designed for use with hot sticks incorporating a shotgun adapter
- 100% Electrically proof tested (ASTM F711)

PN _____ DESC _____

CPVD275KV.....240V-275KV

