

# Clampsticks

"AKA" Shotgun Sticks feature a high quality foam filled fiberglass reinforced plastic tube providing maximum insulation and mechanical strength. They are lightweight and easy to handle.

Feature a fixed length shotgun with external operating rod.

Tested per ASTM F711.

**CPCS-8106**



PN	DESC
CPCS-8104.....	4'6"
CPCS-8106.....	6'6"
CPCS-8108.....	8'6"
CPCS-8108U....	8'6" with Universal Adapter
CPCS-8110.....	10'6"
CPCS-8112.....	12'6"

CPCS-A10019... Clampstick Adapter

CPCS-13413..... Folding Shotgun Stick

Sticks and Hooks

# Telescoping Hot Sticks



**CPTS-220**

PN	DESC
CPTS-208.....	8'
CPTS-212.....	12'7"
CPTS-216.....	16'9"
CPTS-220.....	20'
CPTS-225.....	25'6"
CPTS-225HSB...	25'6" with Bag
CPTS-230.....	30'
CPTS-235.....	35'
CPTS-240.....	39'6"
CPTS-250.....	26' Heavy Duty

Telescoping Hot Sticks offer long reach, speed, convenience and safety.

Fabricated of reinforced high density electrical grade fiberglass laminate for greater strength and dielectric properties.

Flourscent tip section is highly visible and has a foam core. All tip sections are 1.15" diameter. Cushioned cap protects base end.

Triangle shape eliminates "twisting and turning" and enables each section to "lock in automatically"; providing an ergonomic design for better control

Larger shape lock buttons provide easy operation.

Add or remove sections without the use of tools. Sections have a smooth glossy surface and only one size lock button and spring for replacement.

Universal head made of strong aluminum alloy incorporates corona discharge design and holds universal attachments securely.

Tested per ASTM F711.

# Universal Hot Sticks

<b>PN</b> _____	<b>1.25" Diameter</b> _____
CPHS-5674.....	4'
CPHS-5676.....	6'
CPHS-5678.....	8'
CPHS-56710.....	10'
CPHS-56712.....	12'
CPHS-5464.....	4' Extension
CPHS-8392.....	56" Extension
CPDH-10431.....	Universal Disconnect Hook



Universal sticks feature a high-quality foam filled fiberglass reinforced plastic core providing maximum insulation and mechanical strength. They are light-weight and easy-to-handle with a hard-gloss, porosity-free bright safety yellow finish which is easy to clean and won't chip or peel.

Permanently mounted fiberglass prongs adapt to all Universal adaptor tools. Universal Hotsticks include disconnect hook.

\*optional tools and accessories available upon request

CPDEHS-4618U.... Double End with Hook

<b>PN</b> _____	<b>1.5" Diameter</b> _____
CPHS-9957.....	10' Heavy Duty
CPHS9957K.....	10' Heavy Duty with Bag
CPHS-4220.....	10'
CPHS-4225.....	20'

## Universal Head with Disconnect Stick Adapter



Universal Switching Stick

<b>PN</b> _____	<b>DESC</b> _____
CPSS-4604.....	1.25" X 4
CPSS-4606.....	1.25" X 6'
CPSS-4608.....	1.25" X 8'
CPSS-4610.....	1.25" X 10'
CPSS-4612.....	1.25" X 12'



# Switch Sticks

- Switch heads are made of bronze
- Designed to NEMA standards

<b>PN</b> _____	<b>DESC</b> _____
ST-HSB-4.....	4'8"
ST-HSB-6.....	6'8"
ST-HSB-8.....	8'8"
ST-HSB-10.....	10'8"
ST-HSB-12.....	12'8"
ST-HSB-13.....	13'
ST-HSB-14.....	14'8"



# Hot Stick Storage Bags

High visibility bag with dual snaps (Orange)

Sticks and Hooks



# Capacitor Discharge Tool



**CPCD-1006**



Safely drain the capacitive charge after the circuit is deenergized.  
Optional resistor available to limit discharge current.

Includes:

- 24" X 1-1/4" O.D. electrically tested (ASTM F711) fiberglass pole with hand guard
- 1/4" stainless steel hook with 1-3/8" opening
- Grounding Lead - extra flexible No. 2 str. copper grounding cable with safety yellow neoprene jacket with two hole, tin-plated copper lug terminated on one end in a heat-shrink sleeve
- Rubber tool holder for storage



**CPCD-6753**

PN \_\_\_\_\_ DESC \_\_\_\_\_

CPCD-1004..... Tool with 6' Lead

CPCD-1005..... Tool with 8' Lead

CPCD-1006..... Tool with 10' Lead

CPCD-1007..... Tool with 15' Lead


CPCD-1008..... Tool with 20' Lead

CPCD-6753..... Add on Resistor Stick

Sticks and Hooks

## Rescue Hooks

- Constructed of high-strength vinyl-dipped steel
- 18" Opening mounted on 1-1/4" O.D. Fiberglass Pole
- 100% Electrically proof tested (ASTM F711)

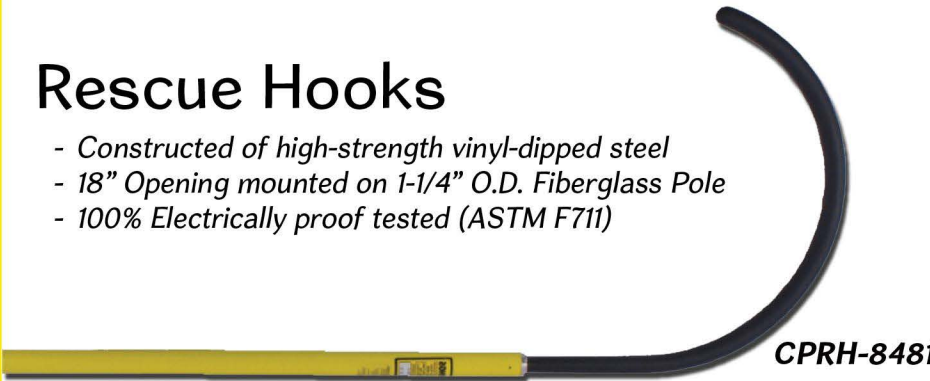

**CPRH-8481**

PN \_\_\_\_\_ DESC \_\_\_\_\_

CPRH-8481..... 6'

CPRH-8482..... 8'



## Electro Static Precipitator

Designed to safely remove the static charge after deenergizing for service work

Includes:


- Brass alloy U-shaped hook to engage precipitator plates
- 4' x 1-1/4" fiberglass installation pole
- 6' of No. 2 Stranded Extra flexible copper grounding cable with durable bright yellow neoprene jacket
- Aluminum alloy T-Handle flat face ground clamp can be attached to flat, round, and square hardware. Serrated jaws 1-1/2" max capacity



PN \_\_\_\_\_ DESC \_\_\_\_\_

CPDS-6768..... Tool with 6' Lead

CPDS-CTO2447... Tool with 12' Lead

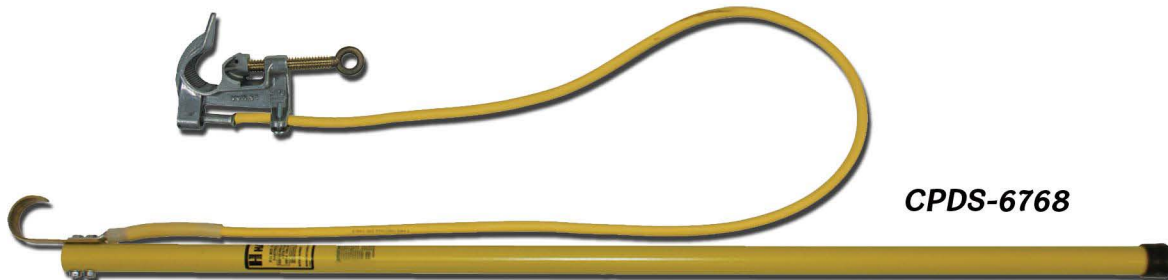


**CPDS-6768**

# Grounding Sets

Four way connector grounding sets provide an excellent system for grounding of 3 phase systems

- Four Way Connector with Sleeves (1)
- 1.5" Serrated Jaw Clamps with Sleeves (4)
- Double Hanger Stud
- Contact Stud
- 1/0 Cubic Cable (34 feet)
- Ferrules (4 pair)
- 26 lbs.

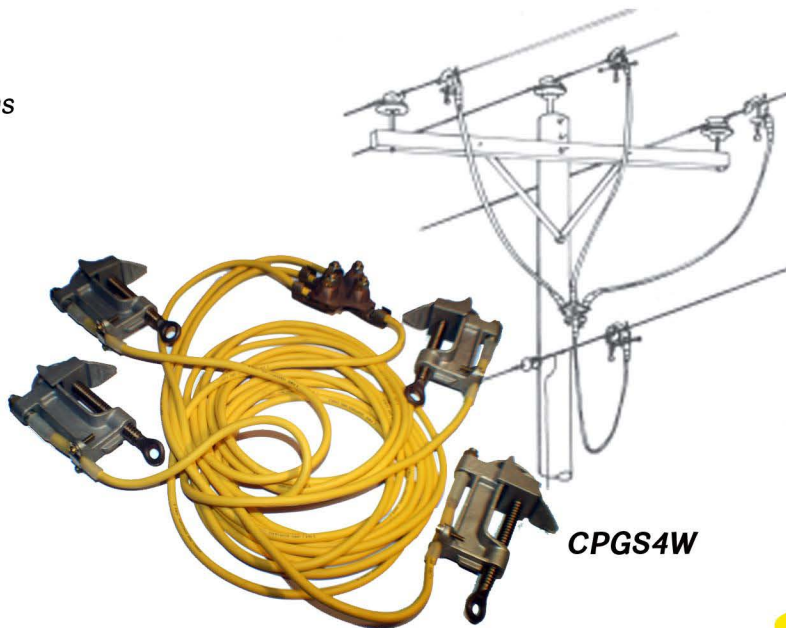

PN_____	DESC_____
CPGS-1273.....	Three Phase Grounding Set
CPGS4W.....	4 Way Grounding Set

CPGSB-4007..... Grounding System Carry Bag

Grounding and Guards

# Pole Guards

- Designed for easy installation and removal
- Guards are tested at 35KV
- Corrugated design allows unit to be easily opened for installing. Supplied with rubber straps to secure the guard to the pole. Strap can be removed with hot stick.
- Fits poles between 6"-12" diameter
- Brush contact only



CCPPG-11927

PN_____	DESC_
CCPPG-11925.....	3'
CCPPG-11927.....	6'

# Digital High/Low Voltage Phasing Meter

PN \_\_\_\_\_ DESC \_\_\_\_\_  
CPPM-6706..... 0-20kV Digital Volt Meter with Conductor Hooks  
Includes Carrying Case, Battery, and instructions  
CPPM-6712..... Pair of Extension Resistors Increase Operating Range  
CPDPK-6713.... Digital Phasing Kit



- 3-1/2 Digit kV Digital Display
- LCD Display with 1/2" tall digits
- Solid State Backlit Display
- 10' coiled cable (retracts to 16")
- Rugged Plastic Case Accomodates pair of AD-ON Resistors
- Attached to two 1-1/4" x 12" Long Fiberglass Sticks. Female universal splines allow attachment to Universal Hot Sticks
- One Conductor hook (2" Diameter) and one 2-1/2" Straight Probe are provided

Meters and Detectors

## Voltage Detector

- Non-contact high voltage detector
- Wide ranges of detection
  - 80V to 275kV
- Eight switch-selectable voltage sensitivity ranges
- Lightweight—minimizes sway at the end of long hot sticks
- Audible and visual indication of live voltage
- Self-test ensures that all system fuctions and indications are working properly by energizing the complete system
- Designed for use with hot sticks incorporating a shotgun adapter
- 100% Electrically proof tested (ASTM F711)

PN \_\_\_\_\_ DESC \_\_\_\_\_  
CPVD275KV..... 240V-275KV

