


Hex T-Handle Wrenches

Solid core T-Handle provides superior grip and rigid construction which limits twisting and flexing and distributed pressure throughout a gloved hand.

Utilizing Cementex double insulation and available in a wide variety of sizes to meet the professional's demands.

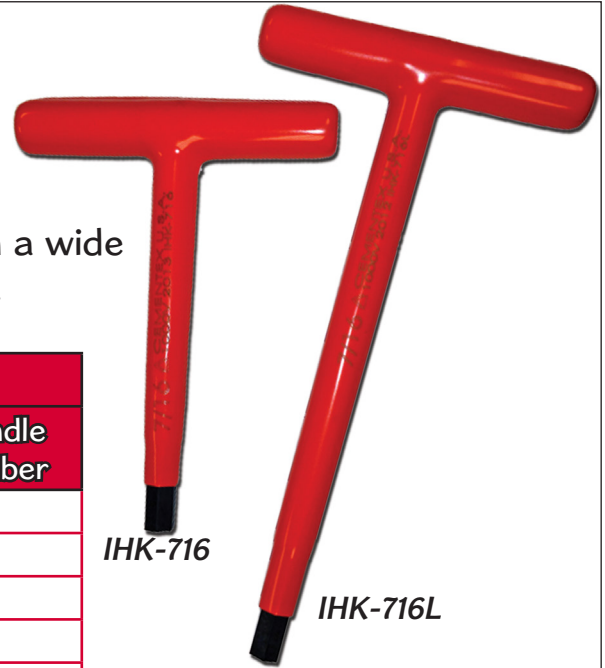

SAE Options

Size	6" T-Handle Part Number	9" T-Handle Part Number	14" T-Handle Part Number
5/64"	IHK-564	—	—
3/32"	IHK-332	—	—
7/64"	IHK-764	—	—
1/8"	IHK-180	—	—
9/64"	IHK-964	—	—
5/32"	IHK-532	—	—
3/16"	IHK-316	IHK-316L	IHK-316XL
7/32"	IHK-732	IHK-732L	IHK-732XL
1/4"	IHK-140	IHK-140L	IHK-140XL
5/16"	IHK-516	IHK-516L	IHK-516XL
3/8"	IHK-380	IHK-380L	IHK-380XL
7/16"	IHK-716	IHK-716L	IHK-716XL
1/2"	IHK-120	IHK-120L	IHK-120XL
9/16"	IHK-916	IHK-916L	IHK-916XL
5/8"	IHK-580	IHK-580L	IHK-580XL
3/4"	IHK-340	IHK-340L	—

Metric Options


Size	6" T-Handle Part Number
2mm	IHK-2M
2.5mm	IHK-2.5M
3mm	IHK-3M
4mm	IHK-4M
5mm	IHK-5M
6mm	IHK-6M
7mm	IHK-7M
8mm	IHK-8M
9mm	IHK-9M
10mm	IHK-10M
11mm	IHK-11M
12mm	IHK-12M
13mm	IHK-13M

Wide range of sizes and lengths available.
Custom construction available upon request.

Cementex double-insulated tools:

- Comply with the IEC 60900 standard
- Comply with ASTM F1505 standard
- Help you meet the requirements of OSHA Safety Related Work Practices, NFPA 70E Standard and CSA-Z462

Cementex double-insulated tools are:

- Tested to 10,000 VAC and rated for 1,000 VAC/1,500DC when working on live parts
- Manufactured in the U.S.A. with both US and globally sourced materials
- Marked with the international safety symbol —  1000V

