


# DriveHandle® Nut Drivers

Cementex Nut Drivers are truly unique. Our thoughtful design allows access to tighter locations more than any other nut driver on the market. We cover the shaft of the driver with two layers of insulation and the head with a single 10,000V tested layer. This provides the same double insulation protection and safety guarantee you've always come to expect from Cementex.

Our superior insulating material and the precision construction of our base tool allow us to provide the slimmest insulated nut drivers available while never sacrificing safety and protection.

- Also available in SAE, Metric, Composite construction, Angled Shaft, and BareHead.
- Non-magnetized as a standard, however a powerful magnet may be included. Contact Cementex or your Dealer to include this feature.
- All nut driver styles are 1000V rated and comply with ASTM F1505 and IEC 60900 standards.

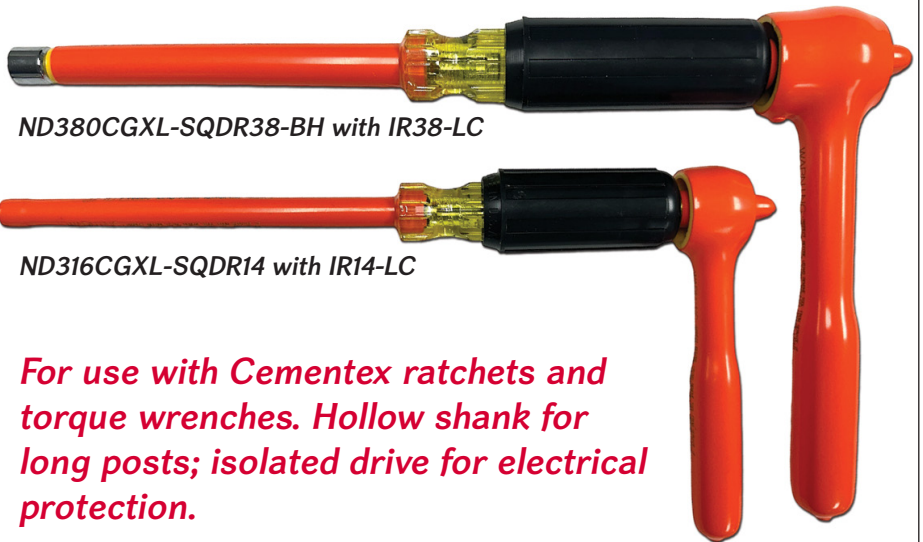

ND380CGXL-SQDR38-BH with IR38-LC

ND316CGXL-SQDR14 with IR14-LC

*For use with Cementex ratchets and torque wrenches. Hollow shank for long posts; isolated drive for electrical protection.*

1/4" Square DriveHandle®	
Part Number	Description
ND316CGXL-SQDR14	3/16" x 6"
ND140CGXL-SQDR14	1/4" x 6"
ND516CGXL-SQDR14	5/16" x 6"
ND1132CGXL-SQDR14	11/32" x 6"
Bare Head 1/4" Square DriveHandle®	
ND316CGXL-SQDR14-BH	3/16" x 6"
ND140CGXL-SQDR14 -BH	1/4" x 6"
ND516CGXL-SQDR14 -BH	5/16" x 6"
ND1132CGXL-SQDR14 -BH	11/32" x 6"

3/8" Square DriveHandle®	
Part Number	Description
ND380CGXL-SQDR38	3/8" x 6"
ND716CGXL-SQDR38	7/16" x 6"
ND120CGXL-SQDR38	1/2" x 6"
ND916CGXL-SQDR38	9/16" x 6"
ND580CGXL-SQDR38	5/8" x 6"
Bare Head 3/8" Square DriveHandle®	
ND380CGXL-SQDR38-BH	3/8" x 6"
ND716CGXL-SQDR38-BH	7/16" x 6"
ND120CGXL-SQDR38-BH	1/2" x 6"
ND916CGXL-SQDR38-BH	9/16" x 6"
ND580CGXL-SQDR38-BH	5/8" x 6"



**\*\*NOTE: Max Torque on 1/4" Square DriveHandle® is 10 Foot/Pounds\*\***

**\*\*NOTE: Max Torque on 3/8" Square DriveHandle® is 22 Foot/Pounds\*\***